







CF - 公制内螺纹24°锥-轻系列带O型圈-旋转螺母-90°弯接头

ISO 12151-2-SWE-L, DKOL 90°

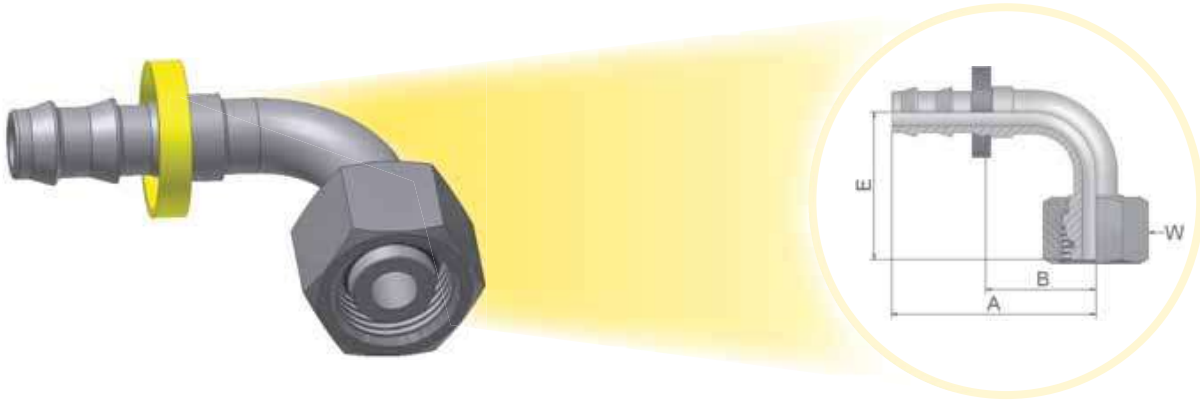

适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 螺纹 公制	 钢管 外径	A	B	E	 W
	DN	Inch	Size	mm	mm	mm	mm	mm	mm	mm
3CF82-6-4	6	1/4	-4	6,3	M12x1,5	6	42	23	36	14
3CF82-8-4	6	1/4	-4	6,3	M14x1,5	8	42	23	32	17
3CF82-10-4	6	1/4	-4	6,3	M16x1,5	10	42	23	31	19
3CF82-10-6	10	3/8	-6	9,5	M16x1,5	10	49	27	35	19
3CF82-10-6B	10	3/8	-6	9,5	M16x1,5	10	49	27	35	19
3CF82-12-6	10	3/8	-6	9,5	M18x1,5	12	49	27	36	22
3CF82-12-6B	10	3/8	-6	9,5	M18x1,5	12	49	27	36	22
3CF82-15-8	12	1/2	-8	12,7	M22x1,5	15	58	32	41	27
3CF82-18-10	16	5/8	-10	15,9	M26x1,5	18	74	37	45	32
3CF82-22-12	20	3/4	-12	19,1	M30x2	22	88	51	55	36

带B和BK的型号芯子材料为黄铜，螺母材料为碳钢。
带标准O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购特殊O型圈。