


13 - NPTF 旋转螺母外螺纹




SAE J476A / J516

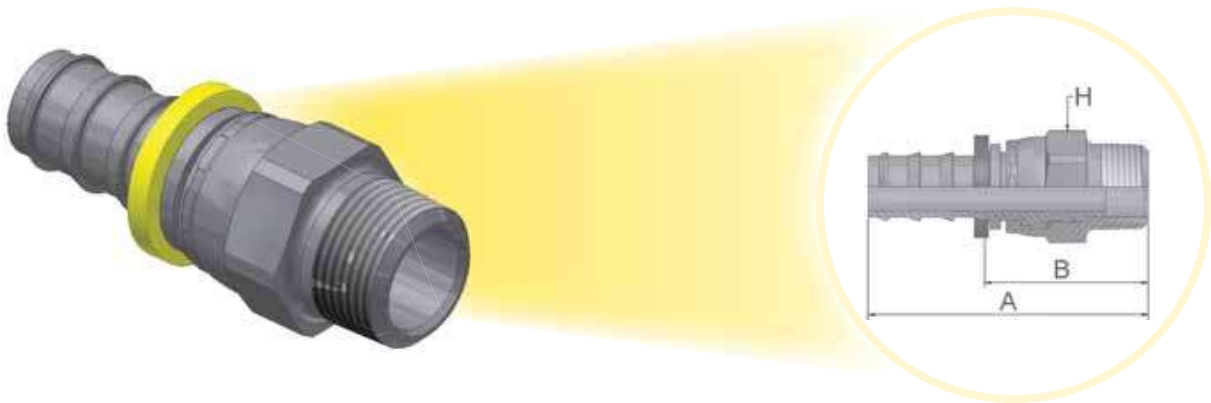

B

适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 螺纹 NPTF	A	B	H
	DN	Inch	Size	mm				
31382-4-4	6	1/4	-4	6,3	1/4x18	41	22	9/16
31382-4-6	10	3/8	-6	9,5	1/4x18	45	23	11/16
31382-6-6	10	3/8	-6	9,5	3/8x18	45	23	11/16
31382-8-8	12	1/2	-8	12,7	1/2x14	56	29	7/8
31382-12-12	20	3/4	-12	19,1	3/4x14	94	58	1-1/4

注: 此接头连接后可在受压力状况下轻微的旋转以缓解作用在软管上的扭矩, 但不能连续或较大角度的旋转。
 注: 接头内部的O型圈与磷酸酯液压油不兼容。