


CF - 内螺纹公制24°锥带O型圈-轻系列-旋转螺母-90°弯接头

ISO 12151-2-SWE90 - DKOL 90°



适用软管类型:

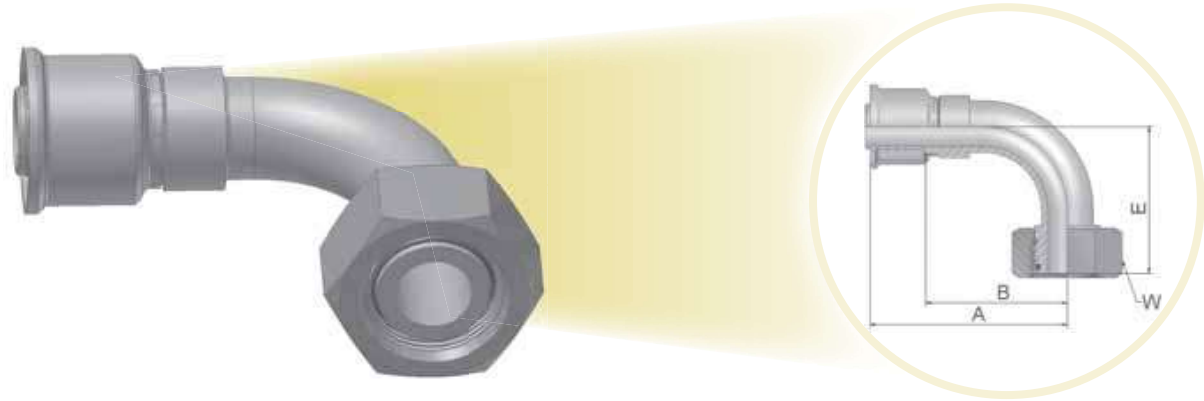

201 / 206 / 213 / 221FR / 285 / 293

B

XXXX-XX-XX 型号 26	软管内径			螺纹 公制	钢管 外径	A	B	E	W
	Inch	Size	mm						
1CF26-8-4	3/16	-4	5,0	M14x1,5	8	45	24	29	17
1CF26-10-5	1/4	-5	6,3	M16x1,5	10	55	36	29	19
1CF26-10-6	5/16	-6	8,0	M16x1,5	10	53	33	35	19
1CF26-12-6	5/16	-6	8,0	M18x1,5	12	56	35	36	22
1CF26-12-8	13/32	-8	10,0	M18x1,5	12	51	30	31	22
1CF26-15-8	13/32	-8	10,0	M22x1,5	15	58	38	41	27
1CF26-12-10	1/2	-10	12,5	M18x1,5	12	57	34	40	22
1CF26-18-10	1/2	-10	12,5	M26x1,5	18	57	34	38	32
1CF26-18-12	5/8	-12	16,0	M26x1,5	18	57	34	38	32
1CF26-22-12	5/8	-12	16,0	M30x2	22	78	55	47	36
1CF26-18-16	7/8	-16	22,0	M26x1,5	18	92	65	70	32
1CF26-28-16	7/8	-16	22,0	M36x2	28	95	68	71	41
1CF26-28-20	1-1/8	-20	29,0	M36x2	28	117	90	81	41
1CF26-35-20	1-1/8	-20	29,0	M45x2	35	117	90	77	50
1CF26-35-24	1-3/8	-24	35,0	M45x2	35	117	89	79	50
1CF26-42-24	1-3/8	-24	35,0	M52x2	42	117	89	76	60

材料: 碳钢, 镀锌
标准的软管接头配备有丁晴橡胶(NBR)O型圈, 其适用的工作温度为-30°C至+105°C。可根据需要选用特殊O型圈 (Viton或EPDM)。O型圈的尺寸和型号详见《O型圈型号表》