






C9 - 公制内螺纹24°锥带O型圈-重系列-旋转螺母-直接头

ISO 12151-2-SWS-S, DKOS

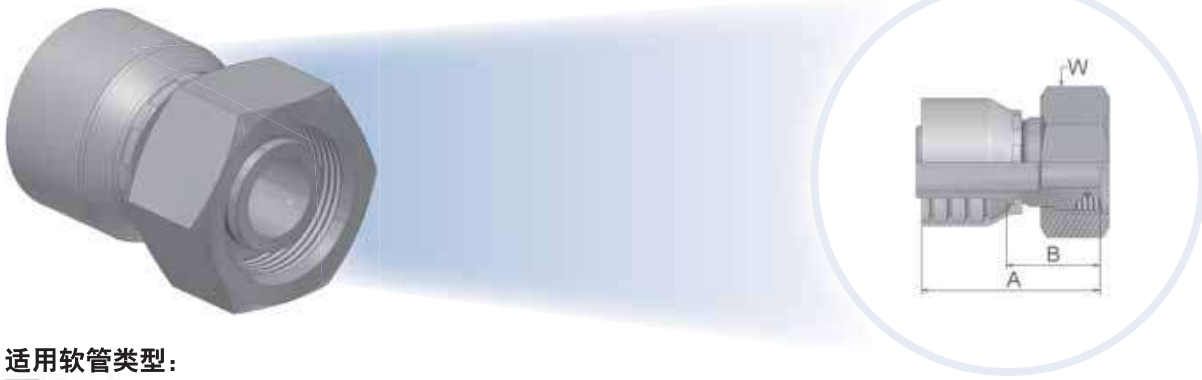

适用软管类型:

 46	441, 461LT, 462, 462ST, 463, 492, 492ST, 692, 692 TWIN
 43	381, 301SN, 302, 481, 421SN, 422, 426, 436, 441, 451TC, 471TC /472TC, 493, 811, 881

XXXX-XX-XX 型号  		 软管内径				 螺纹 公制	钢管 外径	A	B	W
DN	Inch	Size	mm	mm	mm	mm	mm	mm	mm	
1C946-6-4	1C943-6-4	6	1/4	-4	6,3	M14x1,5	6	48	26	17
1C946-8-4	1C943-8-4	6	1/4	-4	6,3	M16x1,5	8	47	23	19
1C946-10-4	1C943-10-4	6	1/4	-4	6,3	M18x1,5	10	46	22	22
1C946-12-4	1C943-12-4	6	1/4	-4	6,3	M20x1,5	12	48	24	24
1C946-14-4	1C943-14-4	6	1/4	-4	6,3	M22x1,5	14	48	24	27
1C946-8-5	1C943-8-5	8	5/16	-5	7,9	M16x1,5	8	46	23	19
1C946-10-5	1C943-10-5	8	5/16	-5	7,9	M18x1,5	10	46	22	22
1C946-12-5	1C943-12-5	8	5/16	-5	7,9	M20x1,5	12	48	24	24
1C946-14-5	1C943-14-5	8	5/16	-5	7,9	M22x1,5	14	48	24	27
1C946-16-5	1C943-16-5	8	5/16	-5	7,9	M24x1,5	16	52	28	30
1C946-8-6	1C943-8-6	10	3/8	-6	9,5	M16x1,5	8	49	26	19
1C946-10-6	1C943-10-6	10	3/8	-6	9,5	M18x1,5	10	45	23	22
1C946-12-6	1C943-12-6	10	3/8	-6	9,5	M20x1,5	12	48	25	24
1C946-14-6	1C943-14-6	10	3/8	-6	9,5	M22x1,5	14	47	24	27
1C946-16-6	1C943-16-6	10	3/8	-6	9,5	M24x1,5	16	50	28	30
1C946-12-8	1C943-12-8	12	1/2	-8	12,7	M20x1,5	12	52	28	24
1C946-14-8	1C943-14-8	12	1/2	-8	12,7	M22x1,5	14	48	24	27
1C946-16-8	1C943-16-8	12	1/2	-8	12,7	M24x1,5	16	52	28	30
1C946-20-8	1C943-20-8	12	1/2	-8	12,7	M30x2	20	53	29	36
1C946-16-10	1C943-16-10	16	5/8	-10	15,9	M24x1,5	16	54	28	30
1C946-20-10	1C943-20-10	16	5/8	-10	15,9	M30x2	20	53	28	36
1C946-20-12	1C943-20-12	20	3/4	-12	19,1	M30x2	20	56	30	36
1C946-25-12	1C943-25-12	20	3/4	-12	19,1	M36x2	25	61	35	46
1C946-25-16	1C943-25-16	25	1	-16	25,4	M36x2	25	63	33	46
1C946-30-16	1C943-30-16	25	1	-16	25,4	M42x2	30	67	38	50
1C946-38-20°		32	1-1/4	-20	31,8	M52x2	38	69	32	60
	1C943-38-20°	32	1-1/4	-20	31,8	M52x2	38	80	33	60

正常订货情况下配丁腈橡胶O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购其他特殊材料的O型圈。

O型圈的尺寸和型号请参考样本E栏中O型圈部分。

材料:碳钢, 镀锌

C: 不锈钢