


# 0C — 公制内螺纹24°锥带O型圈-重系列-旋转螺母-45°弯接头

ISO 12151-2 – SWE 45°-S, DKOS 45°



适用软管类型:

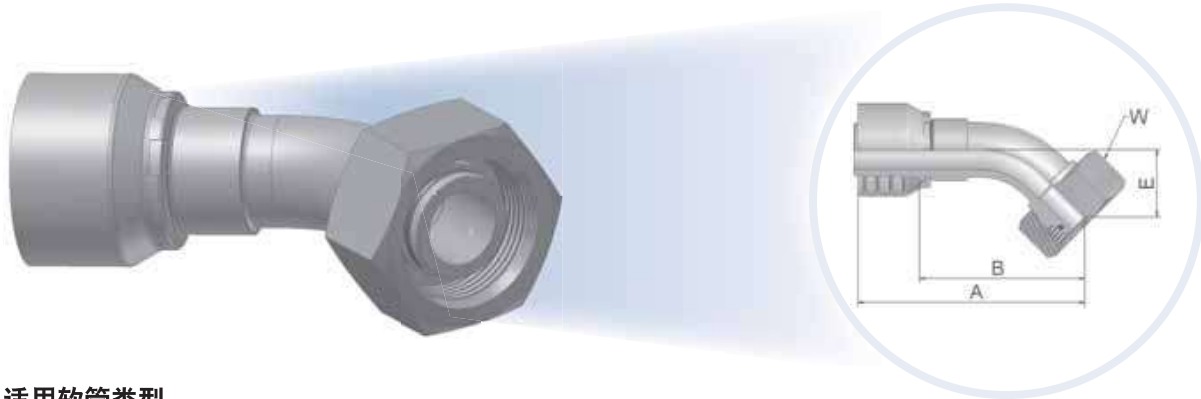

XXXX-XX-XX 型号		软管内径				螺纹 公制	钢管 外径	A	B	E	W
46	43	DN	Inch	Size	mm		mm	mm	mm	mm	mm
10C46-6-4	10C43-6-4	6	1/4	-4	6,3	M14x1,5	6	61	37	17	17
10C46-8-4	10C43-8-4	6	1/4	-4	6,3	M16x1,5	8	59	35	16	19
10C46-10-4	10C43-10-4	6	1/4	-4	6,3	M18x1,5	10	59	35	16	22
10C46-12-4	10C43-12-4	6	1/4	-4	6,3	M20x1,5	12	72	48	17	24
10C46-10-5	10C43-10-5	8	5/16	-5	7,9	M18x1,5	10	62	38	17	22
10C46-12-5	10C43-12-5	8	5/16	-5	7,9	M20x1,5	12	71	47	17	24
10C46-10-6	10C43-10-6	10	3/8	-6	9,5	M18x1,5	10	70	47	19	22
10C46-12-6	10C43-12-6	10	3/8	-6	9,5	M20x1,5	12	69	46	20	24
10C46-14-6	10C43-14-6	10	3/8	-6	9,5	M22x1,5	14	69	46	20	27
10C46-14-8	10C43-14-8	12	1/2	-8	12,7	M22x1,5	14	70	46	22	27
10C46-16-8	10C43-16-8	12	1/2	-8	12,7	M24x1,5	16	72	49	23	30
10C46-16-10	10C43-16-10	16	5/8	-10	15,9	M24x1,5	16	78	52	24	30
10C46-20-10	10C43-20-10	16	5/8	-10	15,9	M30x2	20	77	51	25	36
10C46-20-12	10C43-20-12	20	3/4	-12	19,1	M30x2	20	91	65	28	36
10C46-25-12	10C43-25-12	20	3/4	-12	19,1	M36x2	25	91	65	29	46
10C46-25-16		25	1	-16	25,4	M36x2	25	110	80	33	46
	10C43-25-16	25	1	-16	25,4	M36x2	30	110	80	33	46
10C46-30-16	10C43-30-16	25	1	-16	25,4	M42x2	30	116	86	36	50
10C46-38-20°		32	1-1/4	-20	31,8	M52x2	38	136	98	38	60
	10C43-38-20°	32	1-1/4	-20	31,8	M52x2	38	142	95	38	60°

正常订货情况下配丁腈橡胶O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购其他特殊材料的O型圈。  
O型圈的尺寸和型号请参考样本E栏中O型圈部分。  
带“°”标记的软管接头必须使用Parkrimp 2 设备扣压。  
材料:碳钢, 镀锌