






**CA - 公制内螺纹24°锥带O型圈-轻系列-旋转螺母-直接头**

ISO 12151-2-SWS-L, DKOL

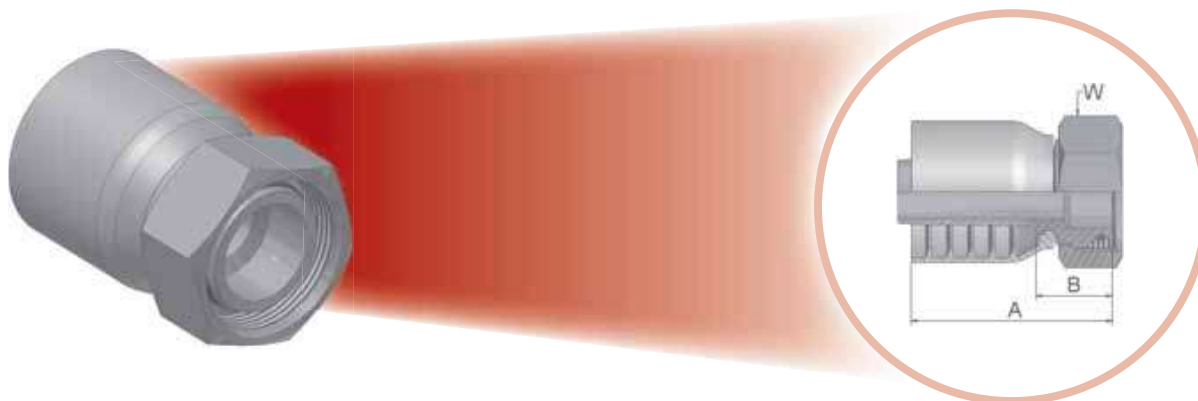

适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 螺纹 公制	钢管 外径 mm	A mm	B mm	 W mm
	DN	Inch	Size	mm					
1CA70-10-6	10	3/8	-6	9,5	M16x1,5	10	53	24	19
1CA70-12-6	10	3/8	-6	9,5	M18x1,5	12	53	24	22
1CA70-15-8	12	1/2	-8	12,7	M22x1,5	15	62	27	27
1CA70-18-8	12	1/2	-8	12,7	M26x1,5	18	57	22	32
1CA70-15-10	16	5/8	-10	15,9	M22x1,5	15	64	27	27
1CA70-18-10	16	5/8	-10	15,9	M26x1,5	18	62	26	32
1CA70-22-10	16	5/8	-10	15,9	M30x2	22	64	24	36
1CA70-18-12	20	3/4	-12	19,1	M26x1,5	18	65	26	32
1CA70-22-12	20	3/4	-12	19,1	M30x2	22	63	24	36
1CA70-28-16	25	1	-16	25,4	M36x2	28	78	33	41
1CA70-35-16	25	1	-16	25,4	M45x2	35	74	29	50
1CA70-35-20	32	1-1/4	-20	31,8	M45x2	35	82	35	50
1CA70-42-24	40	1-1/2	-24	38,1	M52x2	42	99	39	60

正常订货情况下配丁晴橡胶O型圈的接头可在-30°C~+105°C温度下正常使用, 如有需要, 可订购其他特殊材料的O型圈。  
 O型圈的尺寸和型号请参考样本E栏中O型圈部分。  
 注意: 选用表中接头的软管总成的工作压力会受接头最大工作压力的限制: 详情请比较A6-3页接头工作压力与制造软管的工作压力。  
 总成的工作压力为两者中较小者。  
 材料: 碳钢, 镀锌

