






CF — 公制内螺纹24°锥带O型圈-轻系列-旋转螺母-90°弯接头

ISO 12151-2-SWE-L, DKOL 90°

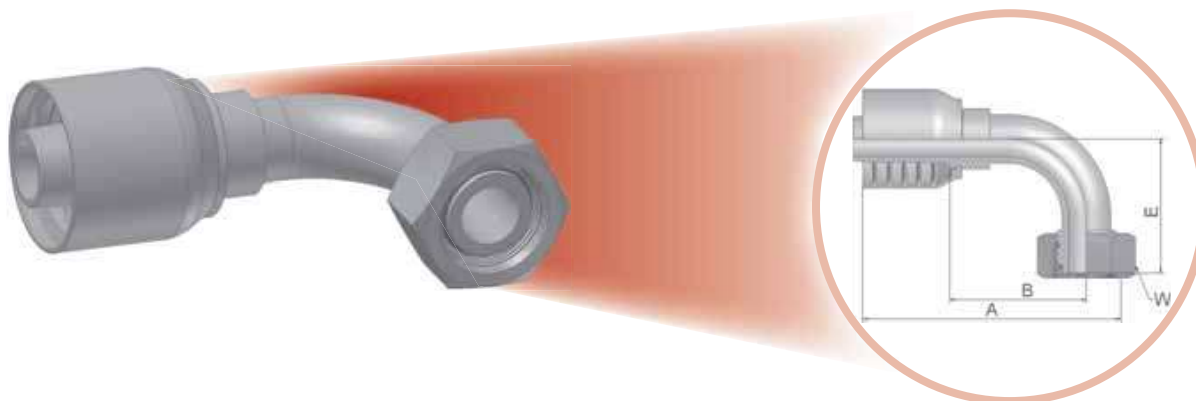

适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 螺纹 公制	钢管 外径	A	B	E	 W
	DN	Inch	Size	mm						
1CF70-12-6	10	3/8	-6	9,5	M18x1,5	12	67	38	37	22
1CF70-15-8	12	1/2	-8	12,7	M22x1,5	15	74	39	45	27
1CF70-15-10	16	5/8	-10	15,9	M22x1,5	15	79	42	50	27
1CF70-18-10	16	5/8	-10	15,9	M26x1,5	18	79	42	49	32
1CF70-18-12	20	3/4	-12	19,1	M26x1,5	18	89	50	56	32
1CF70-22-12	20	3/4	-12	19,1	M30x2	22	89	49	55	36
1CF70-28-16	25	1	-16	25,4	M36x2	28	113	68	73	41
1CF70-35-20	32	1-1/4	-20	31,8	M45x2	35	130	83	79	50
1CF70-42-24	40	1-1/2	-24	38,1	M52x2	42	161	101	101	60

正常订货情况下配丁晴橡胶O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购其他特殊材料的O型圈。

O型圈的尺寸和型号请参考样本E栏中O型圈部分。

注意：选用表中接头的软管总成的工作压力会受接头最大工作压力的限制：详情请比较A6-3页接头工作压力与制造软管的工作压力。

总成的工作压力为两者中较小者。

材料：碳钢，镀锌

D