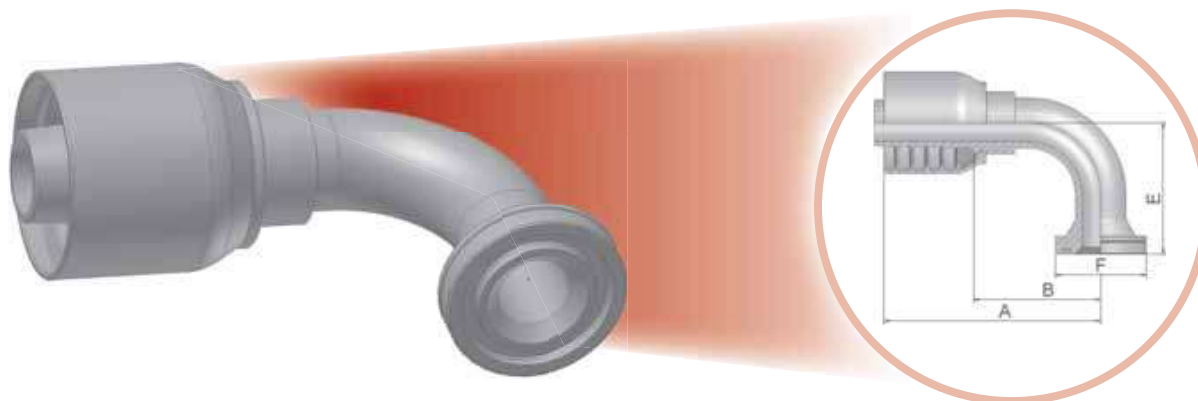





6N — SAE 62系列法兰式-90°弯接头

ISO 12151-3 – E-S / SFS 90° / 6000 psi



适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 法兰规格	A	B	E	F
	DN	Inch	Size	mm					
16N70-8-8	12	1/2	-8	12,7	1/2	74	39	41	32
16N70-8-10	16	5/8	-10	15,9	1/2	95	56	54	32
16N70-12-10	16	5/8	-10	15,9	3/4	92	55	54	41
16N70-16-10	16	5/8	-10	15,9	1	86	46	54	48
16N70-8-12	20	3/4	-12	19,1	1/2	81	42	54	32
16N70-12-12	20	3/4	-12	19,1	3/4	98	58	54	41
16N70-16-12	20	3/4	-12	19,1	1	93	53	53	48
16N70-12-16	25	1	-16	25,4	3/4	113	66	57	41
16N70-16-16	25	1	-16	25,4	1	111	64	70	48
16N70-20-16	25	1	-16	25,4	1-1/4	115	68	68	54
16N70-20-20	32	1-1/4	-20	31,8	1-1/4	130	82	70	54
16N70-24-20	32	1-1/4	-20	31,8	1-1/2	130	82	70	64
16N70-24-24	40	1-1/2	-24	38,1	1-1/2	156	101	81	64

配套的法兰见样本E部分

正常订货情况下配丁晴橡胶O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购其他特殊材料的O型圈。

O型圈的尺寸和型号请参考样本E栏中O型圈部分。

材料:碳钢, 镀锌

D