


## EVL-R 三通组合接头 – 英制螺纹金属密封

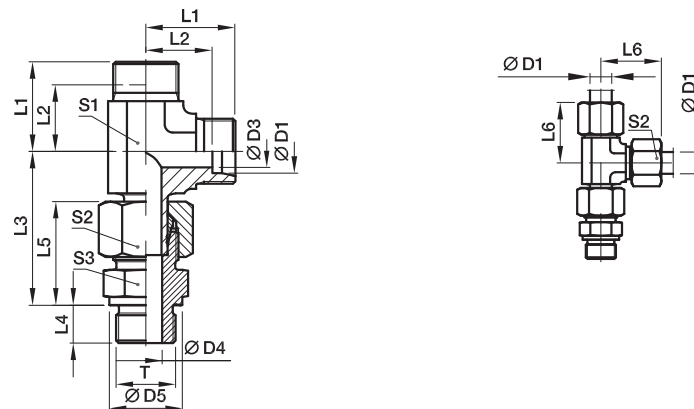

卡套已预装, 最终装配时在力矩激增点时最少拧1/4圈

系列	D1	T	D3	D4	D5	L1	L2	L3	L4	L5	L6	S1	S2	S3	重量 克/件	订货号*	工作压力 (bar)	
																	CF	71
L	06	G 1/8 A	4	4	14	19	12.0	34.5	8	23	27	12	14	14	48	<b>EVL06LROMD</b>	315	315
	08	G 1/4 A	6	6	18	21	14.0	37.5	12	25	29	12	17	19	73	<b>EVL08LROMD</b>	315	315
	10	G 1/4 A	8	6	18	22	15.0	40.0	12	26	30	14	19	19	87	<b>EVL10LROMD</b>	315	315
	12	G 3/8 A	10	9	22	24	17.0	43.0	12	27	32	17	22	22	120	<b>EVL12LROMD</b>	315	315
	15	G 1/2 A	12	11	26	28	21.0	46.5	14	29	36	19	27	27	207	<b>EVL15LROMD</b>	250	250
	18	G 1/2 A	15	14	26	31	23.5	50.0	14	31	40	24	32	27	264	<b>EVL18LROMD</b>	250	250
	22	G 3/4 A	19	18	32	35	27.5	55.5	16	33	44	27	36	32	365	<b>EVL22LROMD</b>	160	160
	28	G 1 A	24	23	39	38	30.5	61.0	18	34	47	36	41	41	556	<b>EVL28LROMD</b>	160	160
	35	G 1 1/4 A	30	30	49	45	34.5	72.0	20	39	56	41	50	50	895	<b>EVL35LROMD</b>	160	160
	42	G 1 1/2 A	36	36	55	51	40.0	79.0	22	42	63	50	60	55	1318	<b>EVL42LROMD</b>	160	160
S	06	G 1/4 A	4	4	18	23	16.0	40.0	12	28	31	12	17	19	90	<b>EVL06SROMD</b>	400	400
	08	G 1/4 A	5	5	18	24	17.0	44.0	12	30	32	14	19	19	117	<b>EVL08SROMD</b>	400	400
	10	G 3/8 A	7	7	22	25	17.5	47.0	12	31	34	17	22	22	153	<b>EVL10SROMD</b>	400	400
	12	G 3/8 A	8	8	22	29	21.5	50.0	12	33	38	17	24	22	192	<b>EVL12SROMD</b>	400	400
	14	G 1/2 A	10	10	26	30	22.0	54.0	14	37	40	19	27	27	266	<b>EVL14SROMD</b>	400	400
	16	G 1/2 A	12	12	26	33	24.5	56.0	14	37	43	24	30	27	321	<b>EVL16SROMD</b>	400	400
	20	G 3/4 A	16	16	32	37	26.5	65.0	16	42	48	27	36	32	480	<b>EVL20SROMD</b>	400	400
	25	G 1 A	20	20	39	42	30.0	73.5	18	47	54	36	46	41	903	<b>EVL25SROMD</b>	250	250
	30	G 1 1/4 A	25	25	49	49	35.5	80.0	20	50	62	41	50	50	1265	<b>EVL30SROMD</b>	160	160
	38	G 1 1/2 A	32	32	55	57	41.0	92.5	22	57	72	50	60	55	1928	<b>EVL38SROMD</b>	160	160

\* 不含螺母及卡套, 总成型号及不同密封材料的货号参考D6页.

请根据  
表面处理及  
材料添加后缀

订货号后缀		
材料	表面处理 及材料	示例
碳钢, 无六价铬镀锌	CF	EVL16SROMDCF
不锈钢	71	EVL16SROMD71