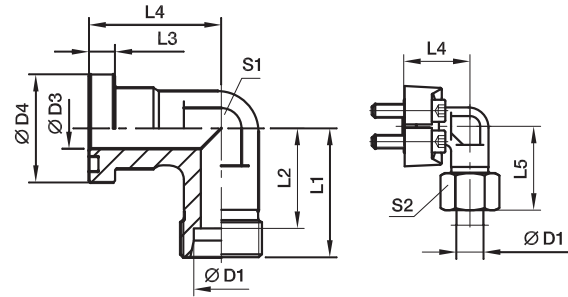


WFS SAE 90° 弯法兰接头(ISO6162-1/-2) – EO 24° 锥连接

3000 PSI 系列

法兰尺寸		D1											螺栓		重量 (碳钢) 千克/件	订货号*	工作压力(bar)	
SAE (in)	ISO (DN)		D3	D4	L1	L2	L3	L4	L5	S1	S2	(公制)	(美制)	CF			71	
1/2	13	12S	12	30.2	50	42.5	6.7	44	58.5	22	24	M 8×25	5/16×1 1/4	0.38	WFS32/12S	210	210	
1/2	13	15L	12	30.2	36	29.0	6.7	36	44.0	24	27	M 8×25	5/16×1 1/4	0.40	WFS32/15L	315	315	
1/2	13	16S	12	30.2	38	29.5	6.7	36	48.0	24	30	M 8×25	5/16×1 1/4	0.43	WFS32/16S	350	350	
1/2	13	18L	12	30.2	50	42.5	6.7	44	59.0	22	32	M 8×25	5/16×1 1/4	0.44	WFS32/18L	315	315	
3/4	19	16S	19	38.1	64	55.5	6.7	53	73.5	27	30	M10×30	3/8×1 1/4	0.60	WFS33/16S	350	350	
3/4	19	18L	19	38.1	39	31.5	6.7	42	48.0	30	32	M10×30	3/8×1 1/4	0.66	WFS33/18L	315	315	
3/4	19	22L	19	38.1	41	33.5	6.7	42	50.0	30	36	M10×30	3/8×1 1/4	0.66	WFS33/22L	160	160	
3/4	19	20S	17	38.1	43	32.5	6.7	42	54.0	30	36	M10×30	3/8×1 1/4	0.76	WFS33/20S	350	350	
3/4	19	25S	17	38.1	45	33.0	6.7	42	57.0	30	46	M10×30	3/8×1 1/4	0.89	WFS33/25S	350	350	
1	25	20S	20	44.5	65	54.5	8.0	60	77.0	34	36	M10×30	3/8×1 1/4	0.78	WFS34/20S	350	350	
1	25	22L	18	44.5	65	57.5	8.0	60	74.0	34	36	M10×30	3/8×1 1/4	0.81	WFS34/22L	160	160	
1	25	28L	25	44.5	44	36.5	8.0	45	53.0	36	41	M10×30	3/8×1 1/4	0.85	WFS34/28L	160	160	
1	25	25S	20	44.5	48	36.5	8.0	45	57.0	36	46	M10×30	3/8×1 1/4	0.95	WFS34/25S	350	350	
1	25	30S	24	44.5	50	36.5	8.0	45	63.0	36	50	M10×30	3/8×1 1/4	1.06	WFS34/30S	250	250	
1 1/4	32	35L	32	50.8	57	46.5	8.0	50	68.0	41	50	M10×35	3/8×1 1/4	1.15	WFS35/35L/10	160	160	
1 1/4	32	25S	27	50.8	55	43.0	8.0	60	67.0	41	46	M10×35	3/8×1 1/4	1.35	WFS35/25S/10	200	200	
1 1/4	32	30S	28	50.8	57	43.5	8.0	50	70.0	41	50	M10×35	3/8×1 1/4	1.40	WFS35/30S/10	200	200	
1 1/4	32	38S	28	50.8	59	43.0	8.0	50	74.0	46	60	M10×35	3/8×1 1/4	1.53	WFS35/38S/10	200	200	
1 1/4	32	35L	32	50.8	57	46.5	8.0	50	68.0	41	50	M12×40	7/16×1 1/2	1.15	WFS35/35L	160	160	
1 1/4	32	25S	27	50.8	55	43.0	8.0	50	67.0	41	46	M12×40	7/16×1 1/2	1.35	WFS35/25S	200	200	
1 1/4	32	30S	28	50.8	57	43.5	8.0	50	70.0	41	50	M12×40	7/16×1 1/2	1.40	WFS35/30S	200	200	
1 1/4	32	38S	28	50.8	59	43.0	8.0	50	74.0	41	60	M12×40	7/16×1 1/2	1.53	WFS35/38S	200	200	
1 1/2	38	35L	30	60.3	78	67.5	8.0	66	83.0	50	50	M12×35	1/2×1 1/2	1.55	WFS36/35L	160	160	
1 1/2	38	42L	36	60.3	58	47.0	8.0	55	70.0	50	60	M12×35	1/2×1 1/2	1.60	WFS36/42L	160	160	
1 1/2	38	38S	36	60.3	64	48.0	8.0	55	79.0	50	60	M12×35	1/2×1 1/2	1.95	WFS36/38S	200	200	

交货时不含螺母卡套，如需订购完整法兰或不同密封材料，请参见H3。

**请根据表面处理及材料添加后缀

订货号后缀					
材料	表面处理 及材料	示例 (仅法兰接头)	示例 包含分体式法兰, 公制螺栓及O型圈	示例 包含分体式法兰, 美制螺栓及O型圈	标准密封材料
碳钢, 无六价铬镀锌	CF	WFS32/16SCFX	WFS32/16SOMDCF	WFS32/16SOMDCFU	NBR
不锈钢	71	WFS32/16S71X	WFS32/16SOMD71	WFS32/16SOMD71U	VIT