


565系列

DN 12.5 钢

DN 12.5 (1/2"). 流量 45 l/min (9.9 GPM UK)。连接时最大工作压力40MPa。钢质材料丁腈橡胶密封。部分X65系列ISO 16028标准接头可以兼容其他平面的钢质接头。

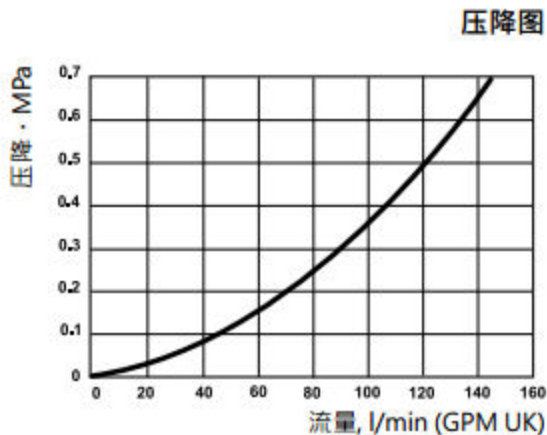

		产品编号	连接	长度	直径	扳手尺寸	密封
母接头	内螺纹	105651105	Rc 1/2"	74.8	38.2	32	NBR
		105651205	G 1/2"	74.8	38.2	32	NBR
		105651215	G 1/2"	74.8	38.2	32	FPM
		105651207	G 3/4"	76.3	38.2	33	NBR
		105651217	G 3/4"	76.3	38.2	33	FPM
		105651405	1/2" NPT	74.8	38.2	32	NBR
		105651605	3/4" -16 ORB	74.9	38.2	32	NBR
		105651285	G 1/2"	74.8	38.2	32	NBR
公接头	内螺纹	105656105	Rc 1/2"	71.4	35.9	32	NBR/PUR
		105656205	G 1/2"	71.4	35.7	32	NBR/PUR
		105656215	G 1/2"	71.4	35.7	32	FPM
		105656207	G 3/4"	72.9	36.7	33	NBR/PUR
		105656217	G 3/4"	72.9	36.7	33	FPM
		105656405	1/2" NPT	71.5	35.9	32	NBR/PUR
		105656605	3/4" -16 ORB	71.5	35.7	32	NBR/PUR