



1077 SERIES TNS



Manufactured according to ISO 7241-A and ISO 5675 norms.
Poppet Valve or C.U.R.P. versión

• Materials

Carbon Steel EN -10277-3
Seals: *NBR*
Back-Up-Ring: *PTFE*
Balls: *AISI 1010/1015*
Springs: *Carbon Steel*
DIN 17233/84(B)

• Working temperature (Seals)

	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C

• **Applications:** Designed for Oil hydraulic Applications
according to European Directive 97.23.EC

• Equivalence


ISO 7241-A



MODEL STRUCTURE

Example;

1077.12113 OM

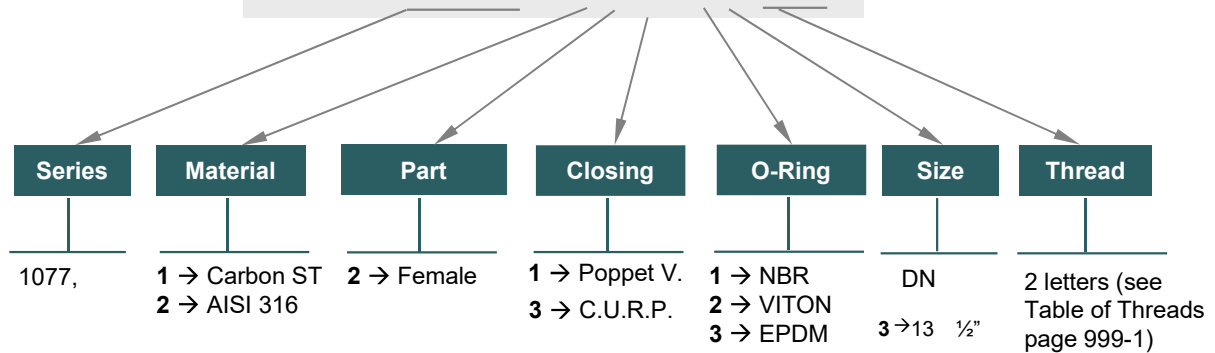

1077-1

