



131 SERIES

CPR


C.U.R.P.



Manufactured according ISO 16028 norm.

Flat Poppet Valve which avoids fluid leakages during the connection and disconnection.

	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C

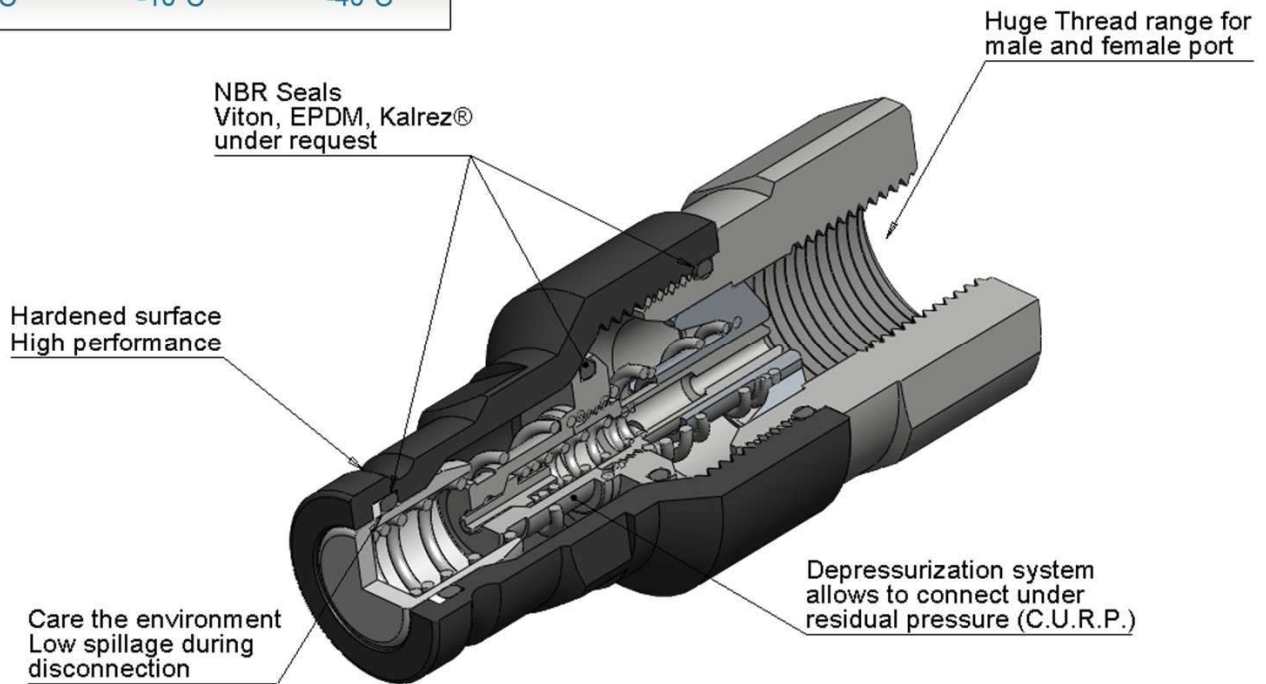

STANDARD MODEL CARBON STEEL						
DN	Port	REF.	Working Pressure	Rated Flow	Max. Residual Pressure	Spillage
09	3/8" BSP	131.11312AC	350 Bar	45 l/min	300 Bar	0,010 ml
13	1/2" BSP	131.11313AD	330 Bar	90 l/min	300 Bar	0,010 ml
15	3/4" BSP	131.11314AE	330 Bar	200 l/min	300 Bar	0,120 ml
17	1" BSP	131.11315AF	330 Bar	300 l/min	250 Bar	0,200 ml
21	1 1/4" BSP	131.11316AG	300 Bar	380 l/min	250 Bar	0,250 ml
30	1 1/2" BSP	131.11317AH	280 Bar	750 l/min	200 Bar	0,300 ml

131-5

