



131 SERIES CPR

STAINLESS STEEL
AISI 316



Manufactured according ISO 16028 norm.
Flat Poppet Valve which avoids fluid leakages during the connection and disconnection.

• **Materials**


Stainless steel AISI 316
Seals: NBR, Viton or EPDM
Back-up-ring: PTFE
Balls: AISI 1010/1015
Springs: AISI302 DIN17224

• **Working temperature (Seals)**

	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C

• **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Special for American market


• **Sectors:** Industrial, Chemical



MODEL STRUCTURE

Example;

131.21123 AD

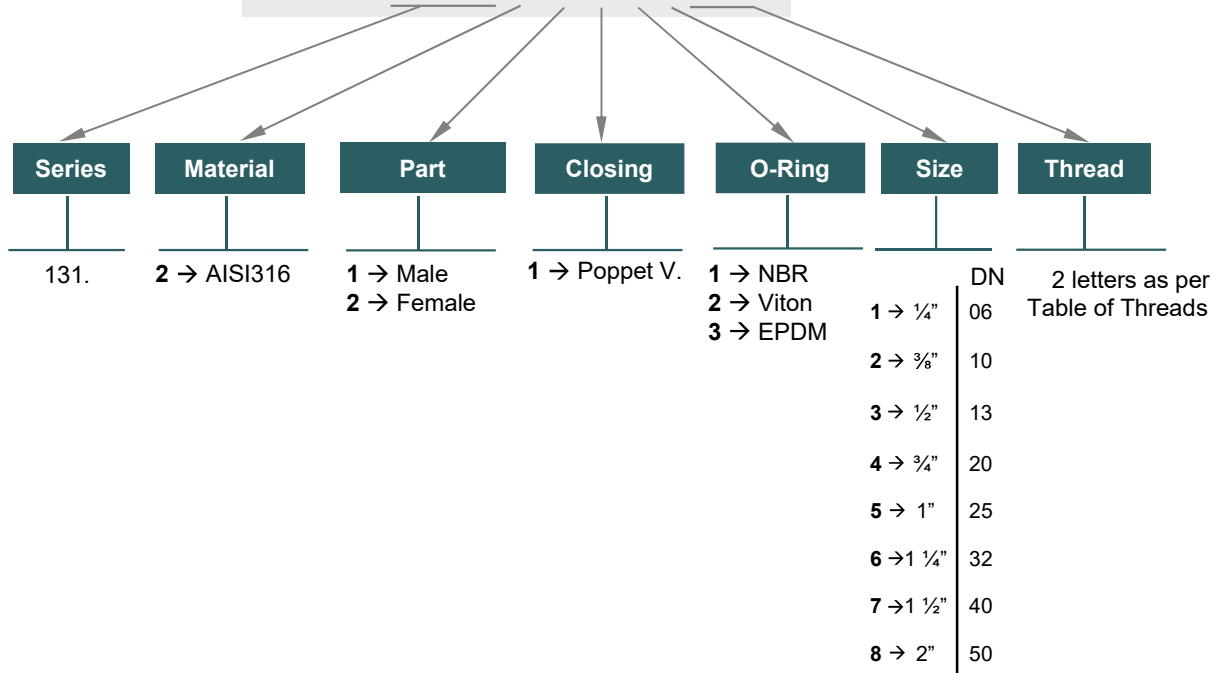

131-6

