



203 SERIES TGW



Designed for high pressure applicaitons.
Poppet Valve closing system.
BSP, NPTF threads and other upon request.

• Materials

Carbon Steel *EN -10277-3, AISI 316 and AISI 303*

Seals: NBR, Viton or EPDM

Back-up-ring: PTFE

Springs: *Carbon Steel DIN 17233/84[B]*

• Working temperature (Seals)


	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C

- **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Special for American market

• Equivalence

GROMELLE 6000
TUTHILL 6000


• Sectors: Industrial



MODEL STRUCTURE

Example;

203.11115 AF

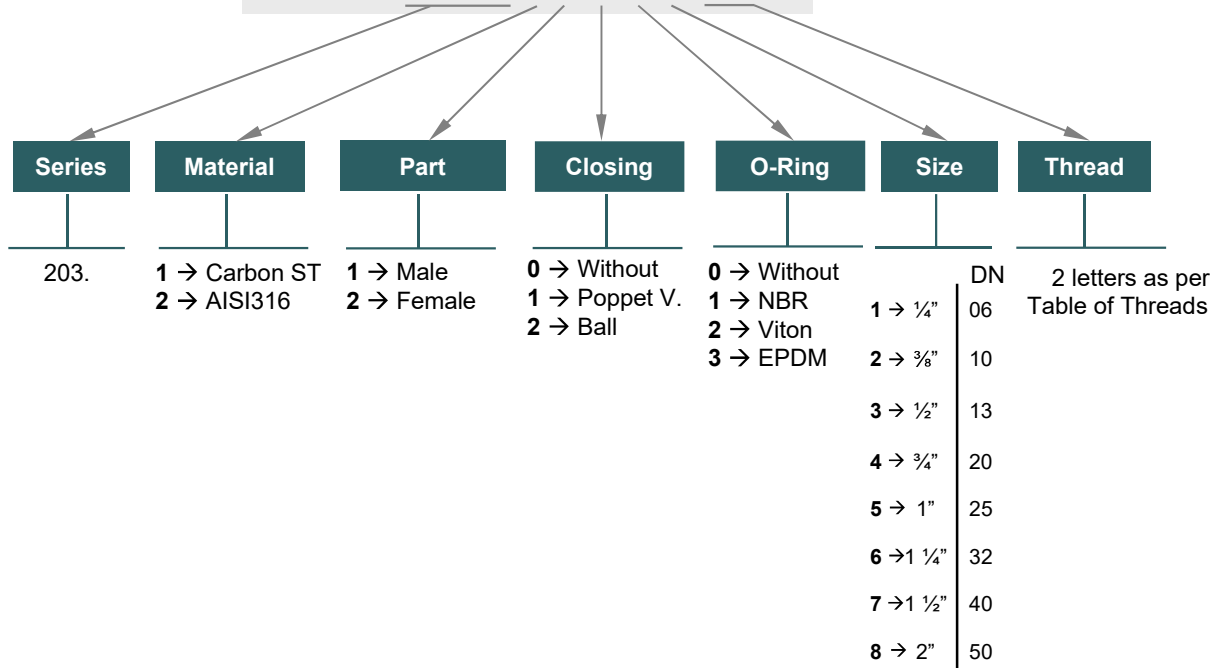

203-1

