



204 SERIES AEV



Designed for Spanish market.
Poppet Valve closubg system.
BSP threads and other available upon request.

• Materials

Carbon Steel *EN -10277-3*

Seals: NBR, Viton or EPDM

Springs: *Carbon Steel DIN 17233/84(B)*

• Working temperature (Seals)

	NBR	Viton	EPDM
+100°C	+100°C	+200°C	+150°C
-30°C	-30°C	-10°C	-40°C

- **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Special for American market


• Sectors: Agricultural



MODEL STRUCTURE

Example;

204.12113 AD

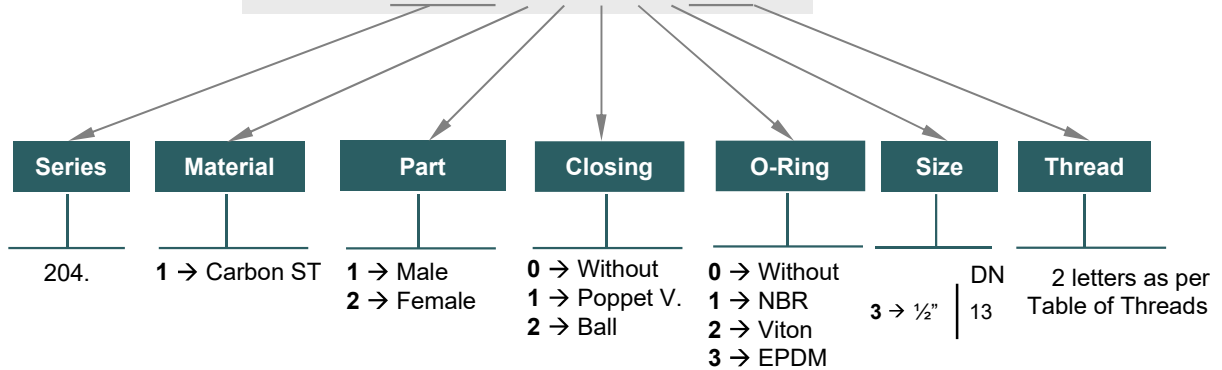

204-1

