

	SP1200	SP1200S
Crimping range (mm) ¹⁾	10-54	10-54
Crimping range (inch) ¹⁾	0.39-2.12	0.39-2.12
Max. crimping force (kN)	1200	1200
Max. crimping force (tonnage)	120	120
Number of crimpings/hour ²⁾	420/1600 ⁵⁾	420/2500 ⁵⁾
Hose size ID (inch)	1¼	1¼
Die set ³⁾	CC22	CC22
Max. opening (mm) ⁴⁾	+25/+63 ⁶⁾	+25/+63 ⁶⁾
Master die D/L (mm)	84 / 78	84 / 78
Master die D/L (inch)	3.31 / 3.07	3.31 / 3.07
Control	UC	UC
Motor (kW)	4	4
Motor (HP)	5.5	5.5
SIZE: length (mm)	970	755 / 653
width (mm)	1020	726 / 473
height (mm)	2030	1085 / 710
SIZE: length (inch)	38.2	29.7 / 25.7
width (inch)	40.2	28.6 / 18.6
height (inch)	80	42.7 / 28
Weight (kg)	1350	850 / 100
Weight (lbs)	2976	1874 / 221

Options:
GC-Tool
Foot pedal
Electric back stop device
Mechanical back stop device
Auto greasing
UC1, UC2, UC3




- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle
- 3) See table for die set data
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.
- 5) Full cycle / 10 mm cycle
- 6) Die travel / feeding channel

SP1200 is the biggest and strongest machine in the side feed crimping line.


The innovative structure of this model allows the hose to be fed from the side and makes crimping of any odd shaped hose assemblies easier and more accurate than ever before.



SP1200S

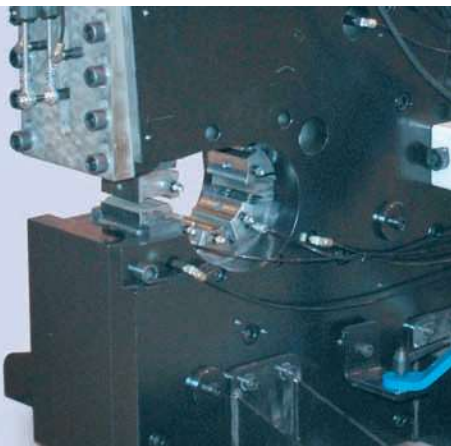

Foot pedal

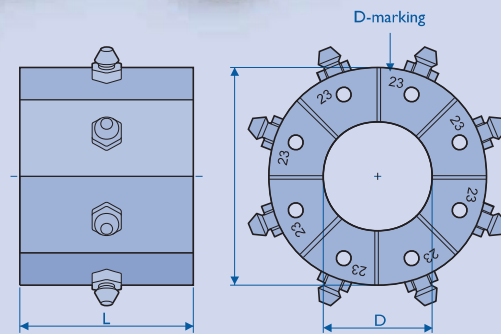

18315/xx
CC22

Pno	Crimping range	D	L
18315/10	10.0 - 12.0	10	50
18315/12	12.0 - 14.0	12	50
18315/14	14.0 - 16.0	14	50
18315/16	16.0 - 19.0	16	50
18315/19	19.0 - 23.0	19	50
18315/23	23.0 - 27.0	23	50
18315/27	27.0 - 31.0	27	50
18315/31	31.0 - 36.0	31	50
18315/36	36.0 - 41.0	36	50
18315/41	41.0 - 47.0	41	50
18315/47	47.0 - 54.0	47	50