


TRELLJET 561/581

INDUSTRIAL MAINTENANCE

High pressure jetting

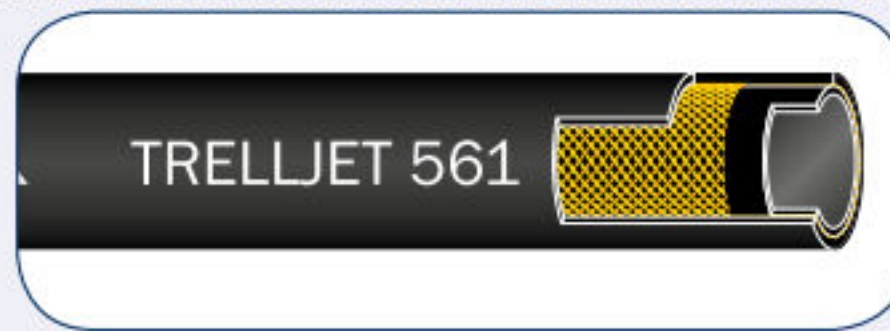

Applications

Specially designed for professional and industrial high pressure cleaning.
Efficient for machines, vehicles, floors, public areas, facades, etc.
Suitable for mobile pressure washers, fixed installations and reel mounted applications.
TRELLEJET 581: also for the food industry and public baths.

Advantages

- Smooth cover (non-staining for TRELLEJET 581), oil and detergent resistant, wear and weather resistant.
- High temperature resistance.
- Light weight, flexible and kink resistant.
- Long service life.

Technical description

Inner tube: NBR/SBR, black, smooth.
Reinforcement: steel, one braid.
Cover: SBR/NBR, black (TRELLEJET 561), blue (TRELLEJET 581), smooth.
Temperature range: - 40 °C to + 150 °C.

Couplings/Fittings

Specially designed fittings are available, please contact us for further information in order to get optimum connections.

| ND | ID mm | Wall thickness mm | OD mm | Reinforcement diameter mm | Working pressure bar | Bursting pressure bar | Bending radius mm | Weight kg/m | Length m | Length m | Notes |
|-----------|-------------|-------------------------|----------|---------------------------------|----------------------------|-----------------------------|-------------------------|----------------|-------------|--------------|--------------|
| | | | | | | | | | 561 | 581 | |
| 6 | 6.4 | + 0.6/- 0.2 | 2.65 | 11.7 ± 0.7 | 9.8 ± 0.3 | 400 | 1000 | 50 | 0.16 | 100 * | 100 * |
| 8 | 7.9 | + 0.6/- 0.2 | 2.75 | 13.4 ± 0.7 | 11.5 ± 0.3 | 400 | 1000 | 60 | 0.19 | 100 * | 100 * |
| 10 | 9.5 | + 0.6/- 0.2 | 3.00 | 15.5 ± 0.7 | 13.6 ± 0.3 | 400 | 1000 | 70 | 0.25 | 100 * | 100 * |
| 13 | 12.7 | + 0.8/- 0.4 | 3.00 | 18.7 ± 0.8 | 16.7 ± 0.3 | 350 | 900 | 80 | 0.30 | 100 * | 100 * |

* 50 % of the volume in each delivery will be random lengths, shortest length of 10 m, at least 50 % will be in fixed length mentioned in the table.

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEJET 561 - ND 08 - 5/16" - WP 400 BAR/5880 PSI - MAX 150 °C - 1 Q 13 - Made in France

TRELLEBORG

TRELLEJET 581 - ND 08 - 5/16" - WP 400 BAR/5880 PSI - MAX 150 °C - 1 Q 13 - Made in France

TRELLEBORG