


AIRWAP 15

INDUSTRIAL MAINTENANCE

Air

TRELLEBORG AIRWAP 15

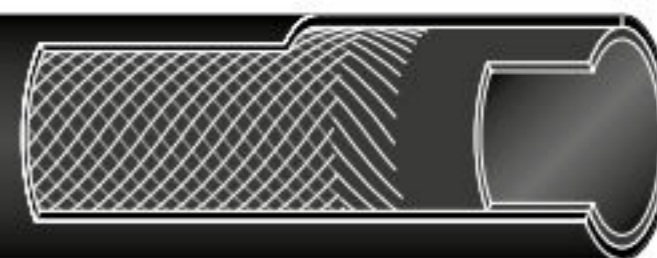

Applications

Air hose for pneumatic tools and any other compressed air applications.
Also suitable (under certain conditions) for industrial water.

Advantages

- Good resistance to abrasion.
- Good flexibility.
- Good economical solution.

Technical description

Inner tube: SBR, black, smooth.

Reinforcement: synthetic textile.

Cover: SBR, black, smooth.

Temperature range: - 30 °C to + 70 °C.

	ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes	
	13.4	± 0.6	3.6	20.6	± 0.7	15	45	60	0.30	20 - 40 - 80
	16.4	± 0.7	4.6	25.6	± 0.8	15	45	70	0.48	20 - 40 - 80
	19.4	± 0.7	4.6	28.6	± 0.8	15	45	80	0.55	20 - 40 - 80
	25.0	± 1.0	5.0	35.0	± 1.1	15	45	100	0.74	20 - 40 - 80

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEBORG AIRWAP 15

WP 15 bar - BP 45 bar