


# AIRWAP 20

INDUSTRIAL MAINTENANCE

Air

TRELLEBORG AIRWAP DIN

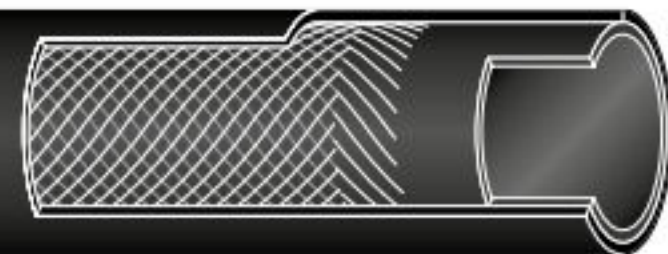

## Applications

Air hose for pneumatic tools and any other compressed air applications.  
Also suitable (under certain conditions) for industrial water.

## Advantages

- Good resistance to abrasion.
- Good flexibility.
- Good economical solution.

## Technical description

**Inner tube:** SBR, black, smooth.

**Reinforcement:** synthetic yarns.

**Cover:** SBR, black, smooth.

**Temperature range:** - 30 °C to + 70 °C.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes	
<b>6</b>	± 0.5	3.00	12	± 0.7	20	60	18	0.16	<b>20 - 40 - 80 - 120</b>
<b>8</b>	± 0.6	3.00	14	± 0.7	20	60	25	0.19	<b>20 - 40 - 80 - 120</b>
<b>10</b>	± 0.7	3.50	17	± 0.8	20	60	35	0.26	<b>20 - 40 - 80 - 120</b>
<b>13</b>	± 0.6	4.50	22.5	± 0.7	20	60	60	0.40	<b>40</b>
<b>16</b>	± 0.7	5.60	27.6	± 0.8	20	60	70	0.61	<b>20 - 40 - 80</b>
<b>19</b>	± 0.8	5.60	30.6	± 1.1	20	60	80	0.69	<b>20 - 40</b>
<b>25</b>	± 1.0	6.5	38.0	± 1.1	20	60	100	1.01	<b>20 - 40 - 80</b>

**Length in blue = stock item.** Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEBORG AIRWAP DIN

WP 20 bar - BP 60 bar