


KLEGAINE GHT 450

INDUSTRIAL MAINTENANCE

Industrial ducting/Elastomer-coated fibre cord

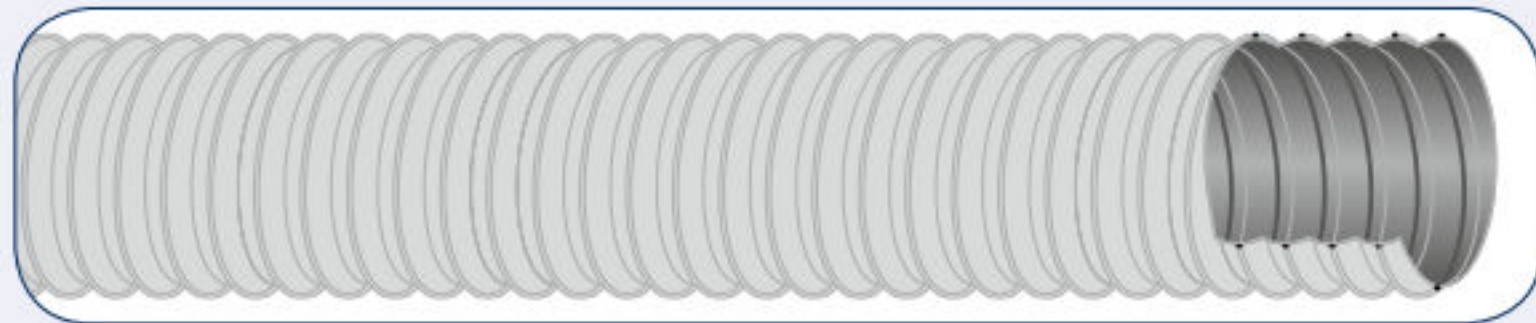

Applications

Extreme temperature ducting for conveying hot air, gas and dust in any industrial environment: steel industry, etc.

Advantages

- Good heat resistance.
- Good mechanical resistance, very flexible.
- Compressible.

For more information, www.trelleborg.com/industrialhose.

Technical description

Flexible and light ducting, made with 2 layers of coated glass fibre cord.
Metal clipped helix.

Colour: inside and outside grey.

Temperature range: - 20 °C to + 450 °C (500 °C temporarily).

Diameters: from 50 to 900 mm.

Consult us.