


KLEGAINE GHYP TEF

INDUSTRIAL MAINTENANCE

Industrial ducting/Elastomer-coated fibre cord

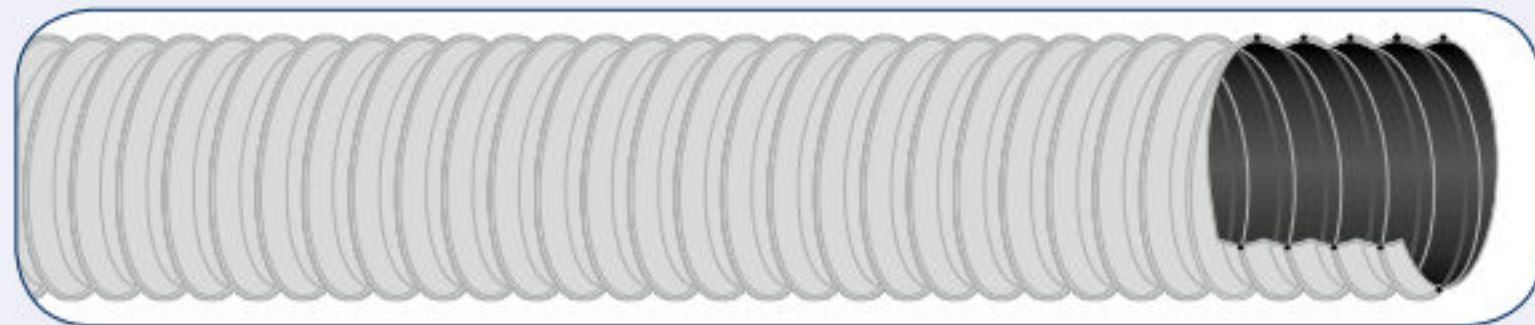

Applications

Ducting for chemical air, gas and dust in any industrial environment, where electrical conductivity is mandatory.

Advantages

- Very good chemical resistance.
- Good heat resistance.
- Compressible.
- Antistatic.

For more information, www.trelleborg.com/industrialhose.

Technical description

Hypalon coated-fibre cord.

Metal clipped helix.

Conductive Teflon®, $R < 10^6 \Omega/m$.

Color: inside black, outside grey.

Temperature range: - 40 °C to + 175 °C.

Diameters: from 50 to 1000 mm.

Consult us.