


VOLUKLER

CHEMICAL AND PETROCHEMICAL

Oil and petroleum/Discharge applications

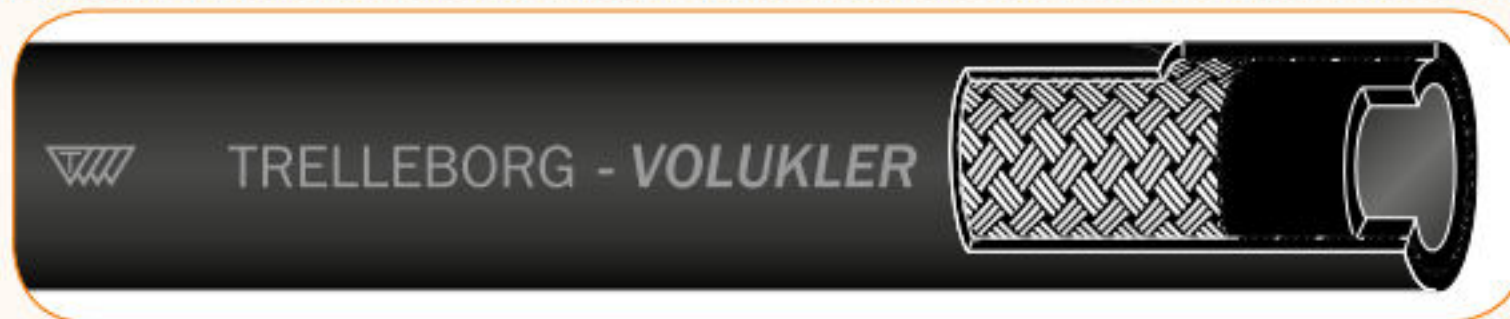

Applications

For equipment of petrol pumps: regular, super and unleaded petrol and diesel oil.

Advantages

- Good resistance to ageing and abrasion from repeated dragging over oily floors.
- Complies with European standard.
- Can be supplied ready fitted with couplings.

Technical description

Inner tube: petrol resistant NBR, black, smooth.

Reinforcement: synthetic textile.

Cover: oil and weather resistant NBR/PVC, black, smooth.

Temperature range: - 35 °C to + 55 °C.

Electrical properties: conductive tube, $R < 10^6 \Omega/\text{lg}$.

Standard/Approval: EN 1360:2013 type 1.

Complementary information

Blue, red or green cover on request.

ID	Wall thickness	OD	Working pressure	Bursting pressure	Bending radius	Weight	Length	Notes
mm	mm	mm	bar	bar	mm	kg/m	m	
16.0	± 0.8	25.0	16	48	80	0.37	40 - 80 - 120	
19.0	± 0.8	31.0	16	48	100	0.60	40 - 80 - 120	
21.0	± 1.0	31.0	16	48	75	0.54	80	
25.0	± 1.0	37.0	16	48	140	0.73	40 - 80	

Length in orange = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:

TRELLEBORG - VOLUKLER - EN 1360:2013/1 - ND - 16 bar - Ω - quarter/year