


CANALKLER 250S assembly

CONSTRUCTION AND ENVIRONMENT

Drain and sewer cleaning

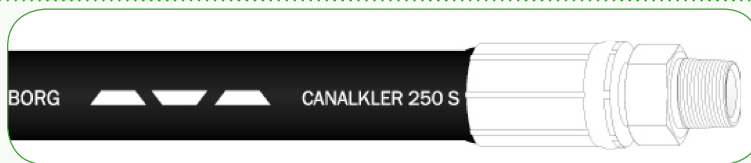

Applications

Sewer jetting and heavy duty, high pressure water cleaning.

Advantages

- Very low sliding resistance which allows: higher cleaning efficiency, reduction of cleaning time and therefore, reduction of fuel consumption.
- Longer lifespan thanks to the special cover compound with higher abrasion resistance.
- Better flexibility, even at low temperatures.
- Easy to handle and user friendly.
- Deformation resistance.
- Extra high strength and security due to aramide reinforcement.

Technical description

Inner tube: SBR, black, smooth.

Reinforcement: aramide textile, braided.

Cover: SBR/NR, black, smooth.

Temperature range: -30 °C to +80 °C.

Standard/Approval: ZH 1/406 (Guidelines for fluid spray jets).

Couplings/Fittings

All hoses are assembled with BSP female/BSP male.

All assembled hoses are pressure tested at 375 bar and have an unique hose number.

Complementary information

Delivered with test certificate on each factory assembled hose.

ID mm	±	Wall thickness mm	±	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Notes
13.0	± 0.5	6.30	± 0.5	25.6	250	> 625	70	0.45	40	
13.0	± 0.5	6.30	± 0.5	25.6	250	> 625	70	0.45	60	
13.0	± 0.5	6.30	± 0.5	25.6	250	> 625	70	0.45	80	
13.0	± 0.5	6.30	± 0.5	25.6	250	> 625	70	0.45	100	
13.0	± 0.5	6.30	± 0.5	25.6	250	> 625	70	0.45	120	
19.0	± 0.6	6.30	± 0.5	31.6	250	> 625	90	0.61	40	
19.0	± 0.6	6.30	± 0.5	31.6	250	> 625	90	0.61	80	
19.0	± 0.6	6.30	± 0.5	31.6	250	> 625	90	0.61	100	
19.0	± 0.6	6.30	± 0.5	31.6	250	> 625	90	0.61	120	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	40	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	50	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	80	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	100	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	120	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	150	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	160	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	180	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	200	
25.0	± 0.8	7.15	± 0.5	39.3	250	> 625	100	0.90	240	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	40	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	80	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	120	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	150	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	160	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	180	
32.0	± 1.0	7.80	± 0.6	47.6	250	> 625	130	1.12	200	
38.0	± 1.0	8.00	± 0.8	54.0	250	> 500	155	1.35	120	

Length in green = stock item. Length in black = non stock (consult us for minimum quantity of order).

Embossed branding:

