

# PVV3 AG (螺纹式连接)




## TECHNICAL INFORMATION


**Materials:** carbon and special steel zinc-plated and yellow bichromated.  
**Seals:** standard in nitrile NBR. Other seals on request. **Working temperatures:** with NBR standard seals -25°C +125°C. **Back-up ring:** in pure Teflon. **Threads:** outside metric according to DIN 2353 L (light) or S (heavy). Other threads on request.

## 技术信息

**材料:** 碳钢、镀锌和镀铬的特种钢。密封圈: 丁腈橡胶NBR。其他材质可依客户要求。工作温度: -25°C+125°C。支撑圈: 纯特氟龙。螺纹: 根据DIN2353轻型或重型标准。其他螺纹可依客户要求。

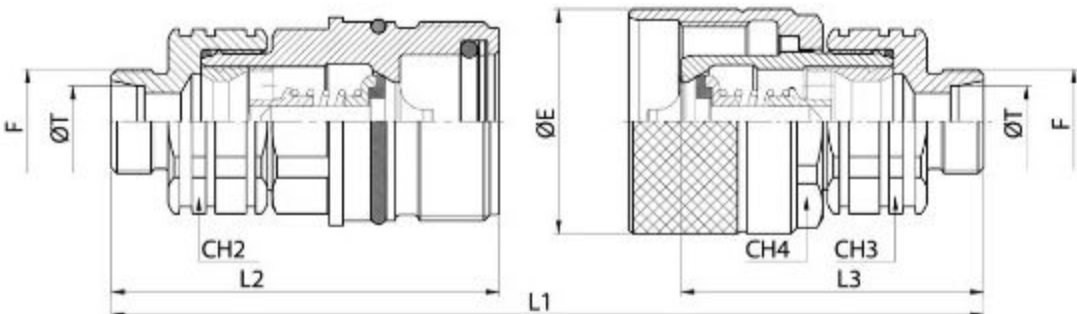

DNP	BG	USA	ISO	ØT	CH2/CH3	CH4	eE	L1	L2	L3	F	ØD. (F)	ØD. (M)
06	1	04	6.3	08L	19	30	35	91	58	57	M 14x1.5	PVV3.0614.302	PVV3.0614.303
10	2	06	10	06L	22	30	34	94	62	47	M 12x1.5	PVV3.1012.302	PVV3.1012.303
				08L	22	30	34	94	62	47	M 14x1.5	PVV3.1014.302	PVV3.1014.303
				10L	22	30	34	96	63	48	M 16x1.5	PVV3.1016.302	PVV3.1016.303
				12L	22	30	34	96	63	48	M 18x1.5	PVV3.1018.302	PVV3.1018.303
13	3	08	12.5	08L	30	36	42	97	64	50	M 14x1.5	PVV3.1314.302	PVV3.1314.303
				10L	30	36	42	99	65	51	M 16x1.5	PVV3.1316.302	PVV3.1316.303
				12L	30	36	42	99	65	51	M 18x1.5	PVV3.1318.302	PVV3.1318.303
				15L	30	36	42	101	66	52	M 22x1.5	PVV3.1322.302	PVV3.1322.303
				18L	30	36	42	101	66	52	M 26x1.5	PVV3.1326.302	PVV3.1326.303
20	4	12	20	12L	36	41	47.5	123	81	63	M 18x1.5	PVV3.2018.302	PVV3.2018.303
				15L	36	41	47.5	125	82	64	M 22x1.5	PVV3.2022.302	PVV3.2022.303
				18L	36	41	47.5	125	82	64	M 26x1.5	PVV3.2026.302	PVV3.2026.303
				22L	36	41	47.5	129	84	66	M 30x2	PVV3.2030.302	PVV3.2030.303
25	5	16	25	18L	41	50	E 55	138	93	71	M 26x1.5	PVV3.2526.302	PVV3.2526.303E
				18L	41	50	Ø 55		71		M 26x1.5	PVV3.2526.303T	PVV3.2526.303T
				22L	41	50	E 55	142	95	73	M 30x2	PVV3.2530.302	PVV3.2530.303E
				22L	41	50	Ø 55		73		M 30x2	PVV3.2530.303T	PVV3.2530.303T
				28L	41	50	E 55	142	95	73	M 36x2	PVV3.2536.302	PVV3.2536.303E
				28L	41	50	Ø 55		73		M 36x2	PVV3.2536.303T	PVV3.2536.303T
				35L	46	50	E 55	146	97	75	M 45x2	PVV3.2545.302	PVV3.2545.303E
				35L	46	50	Ø 55		75		M 45x2	PVV3.2545.303T	PVV3.2545.303T
10	2	06	10	08S	22	30	34	96	64	49	M 16x1.5	PVV3.1016.402	PVV3.1016.403
				10S	22	30	34	96	64	49	M 18x1.5	PVV3.1018.402	PVV3.1018.403
				12S	22	30	34	96	64	49	M 20x1.5	PVV3.1020.402	PVV3.1020.403
13	3	08	12.5	10S	30	36	42	101	68	52	M 18x1.5	PVV3.1318.402	PVV3.1318.403
				12S	30	36	42	101	68	52	M 20x1.5	PVV3.1320.402	PVV3.1320.403
				14S	30	36	42	105	68	54	M 22x1.5	PVV3.1322.402	PVV3.1322.403
				16S	30	36	42	105	68	54	M 24x1.5	PVV3.1324.402	PVV3.1324.403
				20S	30	36	42	109	70	56	M 30x2	PVV3.1330.402	PVV3.1330.403
20	4	12	20	10S	36	41	47.5	125	82	64	M 18x1.5	PVV3.2018.402	PVV3.2018.403
				12S	36	41	47.5	125	82	64	M 20x1.5	PVV3.2020.402	PVV3.2020.403
				14S	36	41	47.5	129	84	66	M 22x1.5	PVV3.2022.402	PVV3.2022.403
				16S	36	41	47.5	129	84	66	M 24x1.5	PVV3.2024.402	PVV3.2024.403
				20S	36	41	47.5	131	85	68	M 30x2	PVV3.2030.402	PVV3.2030.403
25	5	16	25	20S	41	50	E 55	146	97	75	M 30x2	PVV3.2530.402	PVV3.2530.403E
				20S	41	50	Ø 55		75		M 30x2	PVV3.2530.403T	PVV3.2530.403T
				25S	41	50	E 55	150	99	77	M 36x2	PVV3.2536.402	PVV3.2536.403E
				25S	41	50	Ø 55		77		M 36x2	PVV3.2536.403T	PVV3.2536.403T
				30S	46	50	E 55	154	101	79	M 42x2	PVV3.2542.402	PVV3.2542.403E
				30S	46	50	Ø 55		79		M 42x2	PVV3.2542.403T	PVV3.2542.403T
30	6	20	31.5	30S	55	75	80	184	113	118	M 42x2	PVV3.3042.402	PVV3.3042.403
				38S	55	75	80	188	115	120	M 52x2	PVV3.3052.402	PVV3.3052.403

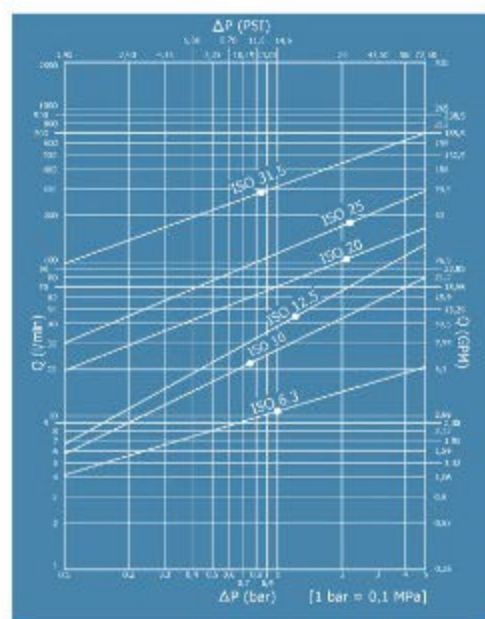

流量图

## 技术参数

规格	最大工作压力 (bar)	流量 (l/min)	最小爆破压力			液体溢出量 (cc)	
			公头 (bar)	母头 (bar)	接口 (bar)		
DNP 06 1 04 6.3	5.5	350	12~24	1400	1400	1400	0.8
10 2 06 10	9	325	23~46	1300	1530	1830	1.4
13 3 08 12.5	10.6	300	45~90	1220	1510	1490	2.7
20 4 12 20	15.7	250	106~200	1070	1390	1490	9.3
25 5 16 25	17.3	250	189~280	1110	1110	1100	16
30 6 20 31.5	29	200	288~480	700	700	700	30

## 塑料



标准材料	母头防泄漏		公头防泄漏		颜色	材料		
DNP	BG	ISO	型号(母头)	重量(g)	包装(pos.)	型号(公头)	重量(g)	包装(pos.)
06	1	6.3	SPW.06002	12	50	SPW.06003	11	50
10	2	10	SPW.10002	10	100	SPW.10003	9	100
13	3	12.5	SPW.13002	15	40	SPW.13003	13	50
13	3	12.5	SPW.13042	15	40	SPW.13043	13	50
20	4	19	SPW.20002	18	30	SPW.20003	21	30
25	5	25	SPW.25002	23	25	SPW.25003	20	25
30	6	31.5	SPW.30002	52	20	SPW.30003	56	20