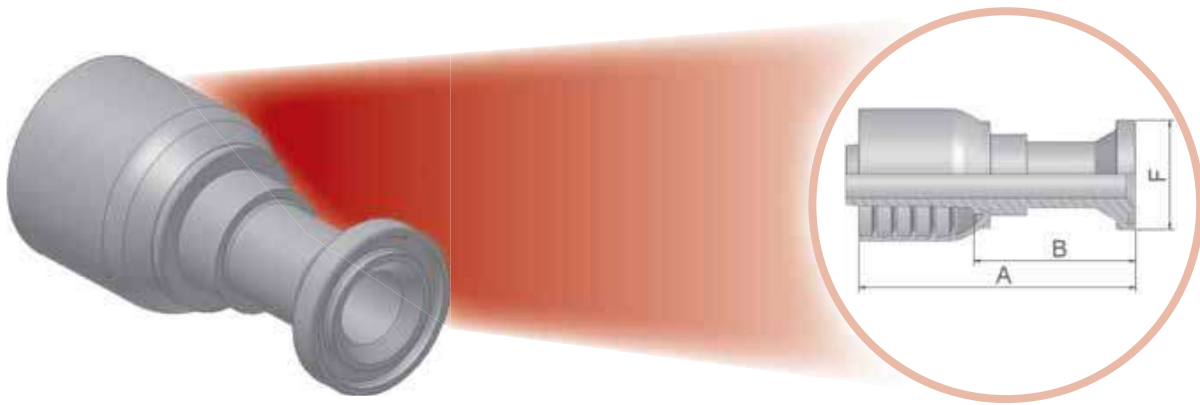




15 - SAE 61系列-法兰式-直接头

ISO 12151-3-S-L / SFL / 3000 psi



适用软管类型:



XXXX-XX-XX 型号 	 软管内径				 法兰规格	A	B	F
	DN	Inch	Size	mm				
11570-8-8	12	1/2	-8	12,7	1/2	89	54	30
11570-10-10	16	5/8	-10	15,9	5/8	116	79	34
11570-12-10	16	5/8	-10	15,9	3/4	69	30	38
11570-12-12	20	3/4	-12	19,1	3/4	98	59	38
11570-16-12	20	3/4	-12	19,1	1	70	31	45
11570-20-12	20	3/4	-12	19,1	1-1/4	75	36	51
11570-16-16	25	1	-16	25,4	1	108	63	45
11570-20-16	25	1	-16	25,4	1-1/4	82	36	51
11570-16-20	32	1-1/4	-20	31,8	1	120	72	45
11570-20-20	32	1-1/4	-20	31,8	1-1/4	120	72	51
11570-24-20	32	1-1/4	-20	31,8	1-1/2	82	35	60
11570-24-24	40	1-1/2	-24	38,1	1-1/2	140	80	60

配套的法兰见样本E部分
 正常订货情况下配丁晴橡胶O型圈的接头可在-30°C~+105°C温度下正常使用，如有需要，可订购其他特殊材料的O型圈。
 O型圈的尺寸和型号请参考样本E栏中O型圈部分。
 材料:碳钢，镀锌