
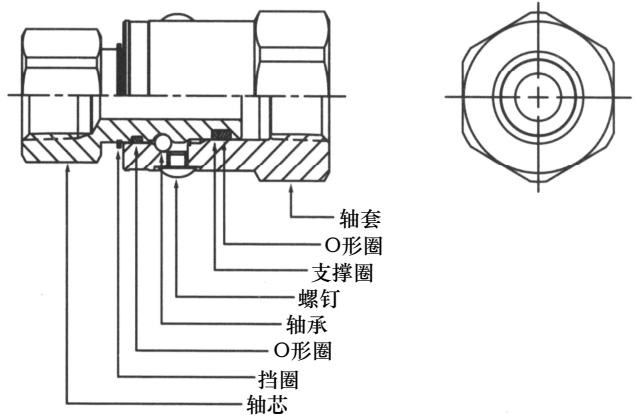


# 旋转接头

## 直通型 PS 系列




### 结构材料

- 轴套: ..... 碳钢
- 轴芯: ..... 碳钢
- 表面处理\*: ..... 镀锌钝黄  
(标准型)
- 轴承: ..... 铬
- O形圈平面密封\*: ..... 丁腈橡胶  
(标准型)
- 支撑圈: ..... 聚四氟乙烯 PTFE


\*关于其他表面处理及密封材料, 请参见订购需知。

### 美制锥管外螺纹 - 美制锥管内螺纹

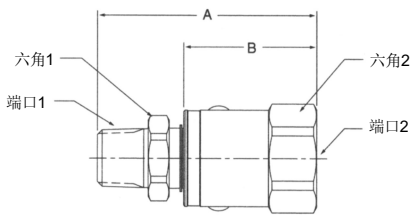


型号	A	B	六角1	六角2	端口1	端口2
PS410102-4-4	2.87" 72.9mm	1.85" 47.0mm	.75" 19.0mm	1.19" 30.2mm	1/4-18 NPTF	1/4-18 NPTF
PS610102-6-6	2.98" 75.6mm	1.92" 48.8mm	.88" 22.2mm	1.31" 33.3mm	3/8-18 NPTF	3/8-18 NPTF
PS810102-8-8	3.24" 82.2mm	1.96" 50.0mm	1.12" 28.6mm	1.50" 36.5mm	1/2-14 NPTF	1/2-14 NPTF
PS1210102-12-12	3.46" 87.8mm	2.16" 55.0mm	1.38" 35.0mm	1.69" 42.9mm	3/4-14 NPTF	3/4-14 NPTF
PS1610102-16-16	3.74" 95.1mm	2.26" 57.4mm	1.62" 41.3mm	1.88" 47.6mm	1/11 1/2 NPTF	1/11-1/2 NPTF

### 美制锥管外螺纹 - 37° 扩口式

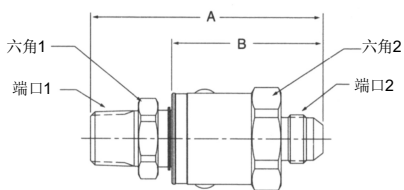

型号	A	B	六角1	六角2	端口1	端口2
PS410103-4-4	3.11" 78.9mm	2.08" 53.0mm	.75" 19.0mm	1.19" 30.2mm	1/4-18 NPTF	7/16-20 UNF-2A
PS610103-6-6	3.23" 82.0mm	2.18" 55.2mm	.88" 22.2mm	1.31" 33.3mm	3/8-18 NPTF	9/16-18 UNF-2A
PS810103-8-8	3.65" 92.6mm	2.38" 60.3mm	1.12" 28.6mm	1.50" 36.5mm	1/2-14 NPTF	3/4-16 UNF-2A
PS1210103-12-12	3.86" 98.1mm	2.57" 65.3mm	1.38" 35.0mm	1.69" 42.9mm	3/4-14 NPTF	1-1/16-12 UN-2A
PS1610103-16-16	4.09" 103.8mm	2.60" 66.2mm	1.62" 41.3mm	1.88" 47.6mm	1/11 1/2 NPTF	1-5/16-12 UN-2A

### 美制锥管外螺纹 - 37° 扩口式内螺纹

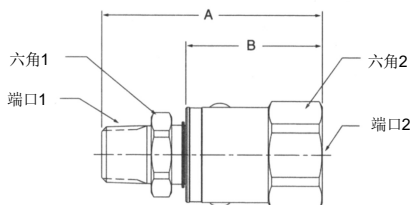

型号	A	B	六角1	六角2	端口1	端口2
PS410106-4-4	2.96" 75.2mm	1.94" 49.3mm	.75" 19.0mm	1.19" 30.2mm	1/4-18 NPTF	7/16-20 UNF-2B
PS610106-6-6	3.06" 77.7mm	2.00" 50.9mm	.88" 22.2mm	1.31" 33.3mm	3/8-18 NPTF	9/16-18 UNF-2B
PS810106-8-8	3.34" 84.9mm	2.07" 52.6mm	1.12" 28.6mm	1.50" 36.5mm	1/2-14 NPTF	3/4-16 UNF-2B
PS1210106-12-12	3.58" 91.0mm	2.29" 58.2mm	1.38" 35.0mm	1.69" 42.9mm	3/4-14 NPTF	1-1/16-12 UN-2B
PS1610106-16-16	3.84" 97.5mm	2.36" 60.0mm	1.62" 41.3mm	1.88" 47.6mm	1/11 1/2 NPTF	1-5/16-12 UN-2B