


# PVV3 AGS (螺纹式连接)

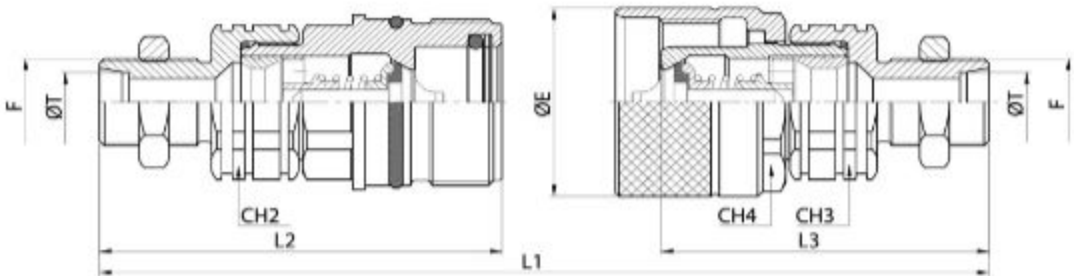


DNP	BG	USA	ISO	ØT	CH2/CH3	CH4	øE	L1	L2	L3	F	COD. (F)	COD. (M)
06	1	04	6.3	08L	19	30	35	121	73	72	M 14x1.5	PVV3.0614.502	PVV3.0614.503
10	2	06	10	06L	22	30	34	128	79	64	M 12x1.5	PVV3.1012.502	PVV3.1012.503
				08L	22	30	34	126	78	63	M 14x1.5	PVV3.1014.502	PVV3.1014.503
				10L	22	30	34	126	78	63	M 16x1.5	PVV3.1016.502	PVV3.1016.503
				12L	22	30	34	126	78	63	M 18x1.5	PVV3.1018.502	PVV3.1018.503
13	3	08	12.5	08L	30	36	42	129	80	66	M 14x1.5	PVV3.1314.502	PVV3.1314.503
				10L	30	36	42	129	80	66	M 16x1.5	PVV3.1316.502	PVV3.1316.503
				12L	30	36	42	129	80	66	M 18x1.5	PVV3.1318.502	PVV3.1318.503
				15L	30	36	42	131	81	67	M 22x1.5	PVV3.1322.502	PVV3.1322.503
20	4	12	20	18L	30	36	42	131	81	67	M 26x1.5	PVV3.1326.502	PVV3.1326.503
				12L	36	41	47.5	153	96	78	M 18x1.5	PVV3.2018.502	PVV3.2018.503
				15L	36	41	47.5	155	97	79	M 22x1.5	PVV3.2022.502	PVV3.2022.503
				18L	36	41	47.5	155	97	79	M 26x1.5	PVV3.2026.502	PVV3.2026.503
25	5	16	25	22L	36	41	47.5	169	104	86	M 30x2	PVV3.2030.502	PVV3.2030.503
				18L	41	50	E 55	182	115	93	M 26x1.5	PVV3.2526.502	PVV3.2526.503E
				18L	50	Ø 55	93	M 26x1.5	PVV3.2526.503T	PVV3.2526.503T			
				22L	41	50	E 55	182	115	93	M 30x2	PVV3.2530.502	PVV3.2530.503E
25	5	16	25	22L	50	Ø 55	93	M 30x2	PVV3.2530.503T	PVV3.2530.503T			
				28L	41	50	E 55	182	115	93	M 36x2	PVV3.2536.502	PVV3.2536.503E
				28L	50	Ø 55	93	M 36x2	PVV3.2536.503T	PVV3.2536.503T			
				35L	46	50	E 55	194	121	99	M 45x2	PVV3.2545.502	PVV3.2545.503E
30	6	20	31.5	35L	50	Ø 55	99	M 45x2	PVV3.2545.503T	PVV3.2545.503T			
				10S	22	30	34	128	79	64	M 16x1.5	PVV3.1016.602	PVV3.1016.603
				10S	22	30	34	128	79	64	M 18x1.5	PVV3.1018.602	PVV3.1018.603
				12S	22	30	34	128	79	64	M 20x1.5	PVV3.1020.602	PVV3.1020.603
13	3	08	12.5	10S	30	36	42	131	81	67	M 18x1.5	PVV3.1318.602	PVV3.1318.603
				12S	30	36	42	131	81	67	M 20x1.5	PVV3.1320.602	PVV3.1320.603
				14S	30	36	42	135	83	69	M 22x1.5	PVV3.1322.602	PVV3.1322.603
				16S	30	36	42	135	83	69	M 24x1.5	PVV3.1324.602	PVV3.1324.603
20	4	12	20	20S	30	36	42	135	83	69	M 30x2	PVV3.1330.602	PVV3.1330.603
				10S	36	41	47.5	155	97	79	M 18x1.5	PVV3.2018.602	PVV3.2018.603
				12S	36	41	47.5	155	97	79	M 20x1.5	PVV3.2020.602	PVV3.2020.603
				14S	36	41	47.5	159	99	81	M 22x1.5	PVV3.2022.602	PVV3.2022.603
25	5	16	25	16S	36	41	47.5	159	99	81	M 24x1.5	PVV3.2024.602	PVV3.2024.603
				20S	36	41	47.5	159	99	81	M 30x2	PVV3.2030.602	PVV3.2030.603
				20S	41	50	E 55	185	117	95	M 30x2	PVV3.2530.602	PVV3.2530.603E
				20S	50	Ø 55	95	M 30x2	PVV3.2530.603T	PVV3.2530.603T			
25	5	16	25	25S	41	50	E 55	190	119	97	M 36x2	PVV3.2536.602	PVV3.2536.603E
				25S	50	Ø 55	97	M 36x2	PVV3.2536.603T	PVV3.2536.603T			
				30S	46	50	E 55	194	121	99	M 42x2	PVV3.2542.602	PVV3.2542.603E
				30S	50	Ø 55	99	M 42x2	PVV3.2542.603T	PVV3.2542.603T			
30	6	20	31.5	30S	55	75	80	224	133	138	M 42x2	PVV3.3042.602	PVV3.3042.603
				38S	55	75	80	224	133	138	M 52x2	PVV3.3052.602	PVV3.3052.603

## TECHNICAL INFORMATION

**Materials:** carbon and special steel zinc-plated and yellow bichromated.  
**Seals:** standard in nitrile NBR. Other seals on request. **Working temperatures:** with NBR standard seals - 25°C + 125°C.  
**Back-up ring:** in pure Teflon. **Threads:** metric outside threads according to DIN 2353 L (light) or S (heavy) bulkhead. Other threads on request.

## 技术信息

**材料:** 高压镀锌和白铬的特种钢。  
**关闭球体**为一级优质 UNI 100CR6。密封圈: 丁腈橡胶 NBR。其他材质可依客户要求改为 FPM 或 EPDM。工作温度: 丁腈橡胶 NBR 密封圈 -25°C+125°C。  
**支撑圈:** 纯铁氟龙。螺纹: 公制外螺纹适用 DIN2353 轻型或重型堵头。其他螺纹可依客户要求。

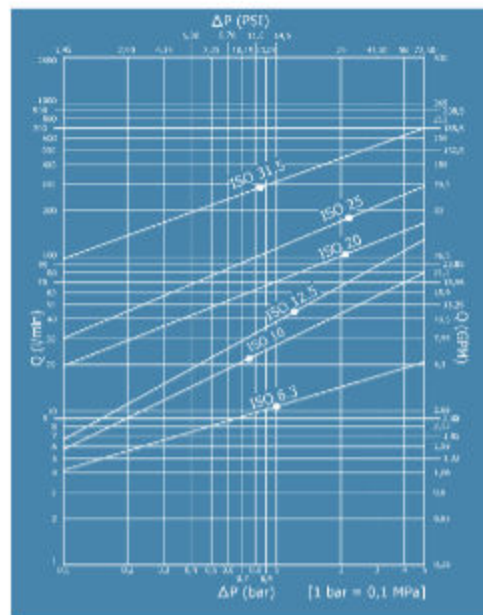

流量图

## 技术参 数

规格	最大工作压力	流量	最小爆破压力			液体溢出量	
			公头	母头	接口		
DNP BG USA ISO	DN (mm)	(bar)	(l/min)	(bar)	(bar)	(bar)	(cc)
06 1 04 6.3	5.5	350	12~24	1400	1400	1400	0.8
10 2 06 10	9	325	23~46	1300	1530	1830	1.4
13 3 08 12.5	10.6	300	45~90	1220	1510	1490	2.7
20 4 12 20	15.7	250	106~200	1070	1390	1490	9.3
25 5 16 25	17.3	250	189~280	1110	1110	1100	16
30 6 20 31.5	29	250	288~480	700	700	700	30

## 塑料



海派规格	订货信息			公头数据			颜色	材料		
	DNP	BG	ISO	型号(母头)	重量(kg)	包装(pos.)			型号(公头)	重量(kg)
06	1	6.3	SPW06002	12	50	SPW06003	11	50	红	聚丙烯
10	2	10	SPW10002	10	100	SPW10003	9	100	红	聚丙烯
13	3	12.5	SPW13002	15	40	SPW13003	13	50	红	聚丙烯
13	3	12.5	SPW13042	15	40	SPW13043	13	50	黑	聚丙烯
20	4	19	SPW20002	18	30	SPW20003	21	30	红	聚丙烯
25	5	25	SPW25002	23	25	SPW25003	20	25	红	聚丙烯
30	6	31.5	SPW30002	52	20	SPW30003	56	20	红	聚丙烯